


---

## Dawnprene TPV 11-90A

If drying temperature over than 110 ,it might cause materials blocking in barrel zone; if use moisture analysis meter, the temperature setting should be on 105 .

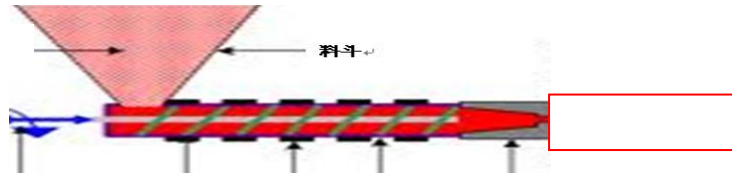

R							
4	16 170	180-185	190-210	190-215	190-215	180-200	50-70

1.Dawnprene TPV PVC

Dawnprene TPV is incompatible with PVC materials, hence must clean the equipment before using.

2. 110 85 2 , .

Above testing data is tested by injected sample block, cutting by the sheet size is 110 85 2 .

3. 25%

Compression Set 25%

4.

The properties is typical performance, is not regarding as technical index or agreement.

5.

Any reprocessing must follow the above instructions, and ensure no content impurity.

6.

Above instructions for reference only, different equipment might have difference parameters, please adjust accordingly with different mold and product shape.

SHANDONG DAWN POLYMER CO.,LTD

: . 265703

Address: Zhenxing Road, Longgang Economic Zone, Longkou, Shandong, China. 265703

( ) 0086-535-8868588;( )0086-535-8833988

Tel:(Foreign Trade) 0086-535-8868588;(Domestic Trade)0086-535-8833988