

Dawnprene TPV 630-70A




TPV

TPV

F :
A , , (TPV) (TPE) . T
 , , .T TPV
.I .

R HS	R HS	
	2017-09-06	
	0.967	/ 3
		ASTM D792
(S A,10 ,2	70	A
		ASTM D2240
100% - 2	2.64	M
- 2	6.80	M
- 2	550	%
- 2	33.5	KN/
		ASTM D624
70	43	%
100	58	%
		ASTM D395
	-55	
		ASTM D746
0.01% D I : N , , , . M 0.01%, :		
D	D /	D /
	80 90	2 3
	100	1
110		105
I 110 , 105 .		; ,

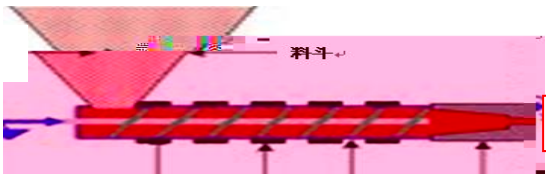

R							
4	16 170	180-185	190-210	190-215	180-205	170-185	50-70

- 1.D TPV PVC
- D TPV PVC , .
2. 120 100 2 , .
- A , 120 100 2 .
3. 25%
- C S 25%
4. .
- T , .
5. .
- A , .
6. .
- A , , .

SHANDONG DAWN POLYMER CO.,LTD

: . 265703

A :Z R ,L E Z ,L ,S ,C . 265703

() 0086-535-8868588;()0086-535-8833988

T :(F T) 0086-535-8868588;(D T)0086-535-8833988